



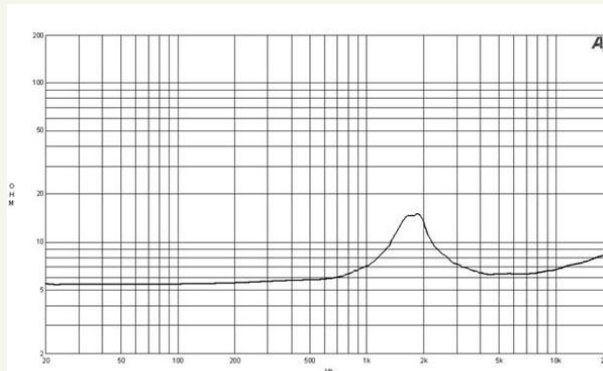

DE10 | HF Drivers

40 W continuous program power capacity
 1" horn throat diameter
 25 mm (1 in) aluminium voice coil
 Mylar diaphragm
 1500 – 18000 Hz response
 107 dB sensitivity

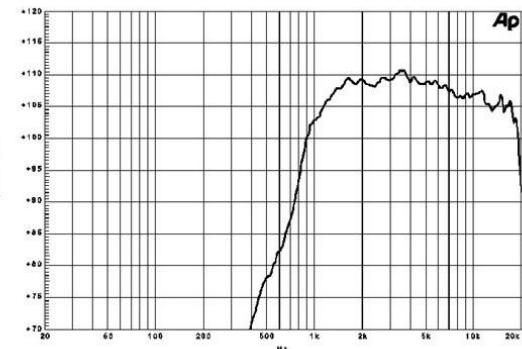

Specifications

Throat Diameter (1)	25 mm (1 in)
Nominal Impedance	8 ohm
Minimum Impedance	6.3 ohm
Nominal Power Handling (2)	20 W
Continuous Power Handling (3)	40 W
Sensitivity (1W/1m) (4)	107 dB
Frequency Range	1.5 -18 kHz
Recommended Crossover (5)	2.5 kHz
Voice Coil Diameter	25 mm (1 in)
Winding Material	Aluminium
Inductance	0.1 mH
Diaphragm Material	Mylar
Flux Density	1.55 T

Mounting and Shipping Info

Two M5 holes 180° on 76 mm (3 in) diameter	
Overall Diameter	90 mm (3.5 in)
Depth	53 mm (2.1 in)
Net Weight (1 unit)	0.8 kg (1.8 lb)
Shipping Weight (8 units)	6.7 kg (14.7 lb)
Shipping Box (8 units)	220x220x150 mm (8.7x8.7x5.9 in)

- ¹ Driver mounted on B&C ME10 horn
- ² 2 hours test made with continuous pink noise signal (6 dB crest factor) within the specified range . Power calculated on rated minimum impedance.
- ³ Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
- ⁴ Applied RMS Voltage is set to 2.83V for 8 ohms Nominal Impedance.
- ⁵ 12 dB/oct. or higher slope high-pass filter.



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>