



TruLink™

2/4-Port Audio Video Splitter / Extender

User Manual



#39962



#39963

Introduction

The TruLink™ Video Switcher/Extender will display two or four computer's video outputs to one monitor or projector. Daisy-chain more than one switcher to expand the number of computers you can connect. With the built-in video signal enhancement, you can place the monitor up to 210 feet away while maintaining your video quality. No software is required and PC selection is easy. Switch between computers via push buttons or use the infrared remote control for PC selection from up to 6 feet away. From use in test bench facilities, data centers and help desks, classrooms, and multi-media centers, the TruLink Video Switcher/Extender delivers both performance and value.

Features:

- Display video output from two or four computers on a single monitor or projector
- PC selection via push buttons or IR remote control
- IR remote control allows you to switch outputs from up to 6 feet away


- Daisy-chain switches to expand the number of computers connected
- Built-in video signal enhancement allows monitor to be placed up to 210 feet away
- Supports video resolutions up to 2048x1536
- Suitable for VGA, SVGA, XGA, SXGA, UXGA, and Multisync monitors
- Maximum bandwidth of 450MHz
- Input connectors: 2 or 4x HD15 Male
- Output connectors: 1x HD15 Female

Package Contents:


- TruLink™ 2 or 4-Port UXGA Monitor Switcher/Extender
- Infrared Remote Control
- 5V/1A DC Power Adapter
- User Manual

Application

2-port Video Selector- #39962

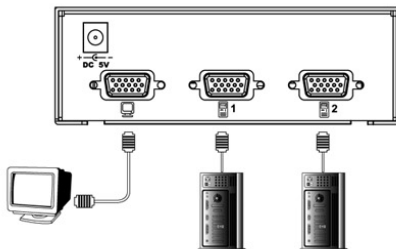

4-port video Selector- #39963



Connecting the Device

1. Use an HD15 male to male cable to connect your monitor or projector to the HD15 female port with the picture of a monitor under it.
2. Use HD15 male to female cables to connect your computers to the HD15 male ports labeled 1-2 or 1-4.
3. Connect the power adapter to the port labeled DC 5V and connect the adapter to a power outlet.
4. Use the push buttons on the front of the device or the IR remote control to switch the video signal sent to your monitor or projector.
5. The LED above the push button on the front of the device will light green to indicate which computer is selected.
6. Turn the on/off the device and your monitor by switching on/off the red toggle switch on the front of the device.



1501 Webster Street

Dayton, Ohio 45404

Product Specification

Function	2-Port (Part #39962)	4-Port (Part #39963)
Type	Video Selector	
Cable Distance (Selector to Monitor)	65 meters (max.)	
Signal Type	VGA, SVGA, XGA, Multi sync	
PC selection	By push button and Infrared remote control	
Video Output Connectors	1 x HDB-15 Female	
Operating Temperature	0-40 degrees (Celsius)	
Storage Temperature	-20~60 degrees (Celsius)	
Humidity	0-80% RH, Non-condensing	
Housing	Metal	
DC Power Adapter	5V	
Max. Resolution	2048x1536	
Bandwidth(-3db)	450MHz	
Video Input Connectors	2x HDB-15 Male	4x HDB-15 Male

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>