

DHT-589BA

Home Theater System

DENON

5.1 Home Theater System featuring AVR-589 HDMI receiver and Boston Acoustics Horizon MCS 90 speaker system.



Color: Black

DENON



Bullet points

AVR-589 Main Features

No need to adjust volume between TV programs and commercials

- Audyssey Dynamic Volume technology dynamically monitors the input audio signal and automatically adjusts volume level in real time.
- Audyssey Dynamic EQ technology monitors the volume level and provides automatic tonal balance compensation to ensure natural sound quality, even when listening at low volume levels.

High Definition Video

- 2 HDMI inputs, version 1.3a
- 1080p, xvYCC, Deep Color HD video pass through

Denon Design Solutions for Maximizing Content Quality

- Identical quality and power for all 5 channels, 75W x 5ch
- Discrete devices for ultimate performance in each block
- New 32-bit floating point high precision DSP

Digital Media Connectivity

- Network Audio/Photo Ready (optional ASD-3N/3W)
- iPod Audio/Photo and Video playback (optional ASD-1R/11R/3N/3W)
- Sirius Satellite Radio Ready

Boston Acoustics Horizon MCS 90 Features

Two way design satellite speakers

- 3" mid-bass drivers and 1/2" soft dome tweeter
- Reduced Baffle Diffraction Design for wider, smoother dispersion
- MagnaGuard video shielding
- Adjustable footings
- Built-in wall mount brackets
- Changeable grilles to match your environment (optional)

Center speaker

- Dual 3" mid-bass drivers
- 1/2" soft dome tweeter
- Reduced Baffle Diffraction Design for wider, smoother dispersion
- MagnaGuard video shielding
- Adjustable footings
- Built-in wall mount brackets
- Changeable grilles to match your environment (optional)


Matching Subwoofer

- 8" down-firing design
- 100 watt power amplifier
- Deep Channel Design (DCD) for more bass from less amplifier power

AVR-589 Input / Output Terminals:		
IN	HDMI	x 2
	Component	x 2
	S-Video	x 3
	Composite	x 4
	Analog Audio (Tuner included)	x 8
	Analog EXT. Input	5.1ch
	Digital OPTICAL	x 2
	Digital COAXIAL	x 2
OUT	HDMI Monitor	x 1
	Component Monitor	x 1
	S-Video Monitor	x 1
	REC	x 1
	Composite Monitor	x 1
	REC	x 1
	Analog Audio REC	x 2
	Audio PRE out (Sub woofer)	x 1
Others	Dock Control Port	x 1
	Sirius Connector	x 1
	FM Tuner Antenna	x 1
	AM Tuner Antenna	x 1

AVR-589 Main Specifications:	
Power amplifier section	
Rated output	*THD figures are power amp stage values.
Front L/R	75 W + 75 W (8 ohms, 20Hz - 20kHz, THD 0.08 %) 110 W + 110 W
Center	(6 ohms, 1 kHz, THD 0.7%) 75 W (8 ohms, 20Hz - 20kHz, THD 0.08 %) 110 W
Surround L/R	(6 ohms, 1 kHz, THD 0.7%) 75 W + 75 W (8 ohms, 20Hz - 20kHz, THD 0.08 %) 110 W + 110 W (6 ohms, 1 kHz, THD 0.7%)
Preamplifier section	
Input sensitivity/impedance	200 mV / 47 kΩ/kohms
Frequency response	10 Hz ~ 100 kHz — +1, -3 dB (DIRECT mode)
S/N Ratio	98 dB (IHF-A weighted, DIRECT mode)
FM section	
Tuning frequency range	87.5 - 107.9 MHz
Usable sensitivity	1.0 μV (11.2 dBf)
AM section	
Tuning frequency range	520 - 1710 kHz
Usable sensitivity	18 μV
General	
Power supply	AC 120 V, 60 Hz
Dimensions (W x H x D)	434 x 171 x 377 mm 17-3/32" x 6-47/64" x 14-27/32"
Weight	TBD kg TBD lbs

MCS 90 Main Specifications:	
Satellite Speakers	
Nominal Impedance	8 ohms.
Dimensions (WxHxD)	113 x 93 x 189 mm 4 3/8" x 4 11/16" x 7 3/8"
Weight	1.14 kg, 2.5 lbs / each
Center Speaker	
Nominal Impedance	8 ohms
Dimensions (WxHxD)	321 x 95 x 145 mm 12 5/8" x 3 3/4" x 5 11/16"
Weight	2.1kg, 4.6 lbs
Subwoofer	
Power supply	AC 120 V, 60 Hz
Dimensions (WxHxD)	390 x 324 x 390 mm 15 3/8" x 12 3/4" x 15 3/8"
Weight	10.3kg, 22.7 lbs

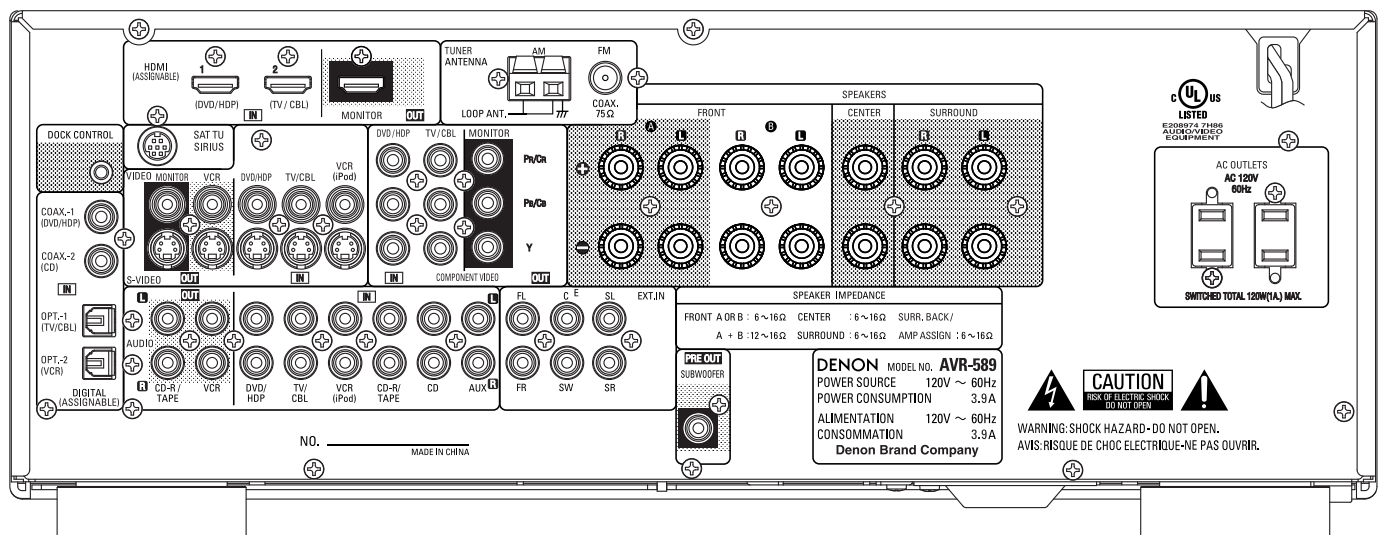

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>