




WESTMINSTER  
post top luminaire

**APPLICATION**

The WST Westminster combines classic acorn beauty with superior photometric performance. Ideal for downtown streetscapes, roadways and parks.

**PHOTOMETRIC**

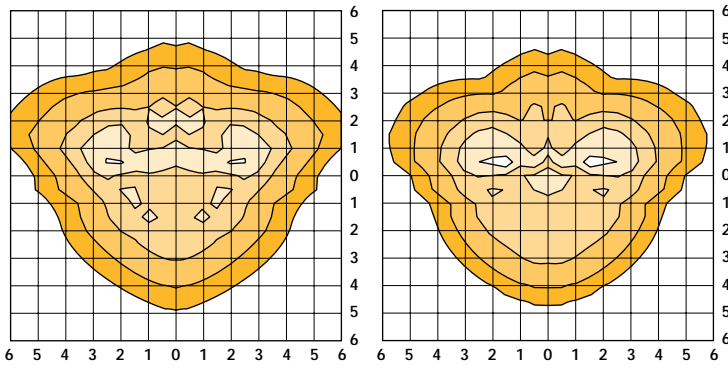

**REPORT #768055**  
15' Mounting Height  
150-Watt HPS, Type III with Clear Top  
16,000-Lumen Lamp


**REPORT #768706**  
15' Mounting Height  
175-Watt MH, Type III with Spun Top  
14,000-Lumen Lamp

**FOOTCANDLE TABLE**



Select mounting height and read across for footcandle values of each isofootcandle line. Distance in units of mounting height.

Mounting Height	Footcandle Values for Isofootcandle Lines				
<b>REPORT #768055</b>					
10'	4.50	2.25	1.12	0.45	0.22
15'	2.00	1.00	0.50	0.20	0.10
20'	1.12	0.56	0.28	0.11	0.05
<b>REPORT #768706</b>					
10'	4.50	2.25	1.12	0.45	0.22
15'	2.00	1.00	0.50	0.20	0.10
20'	1.12	0.56	0.28	0.11	0.05

**DIMENSIONS**

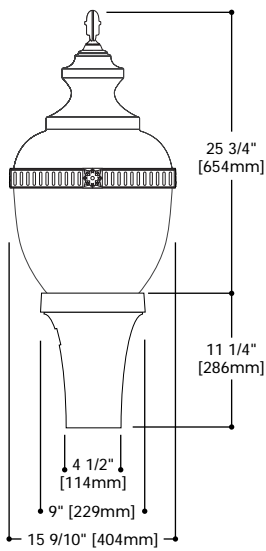

**COEFFICIENTS OF UTILIZATION**

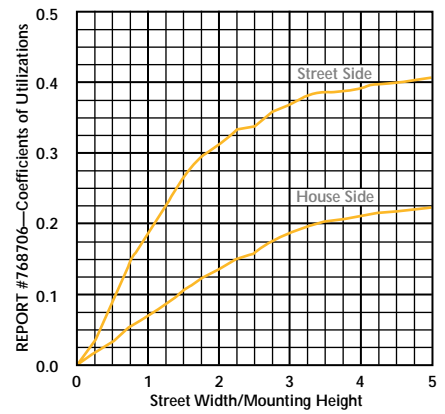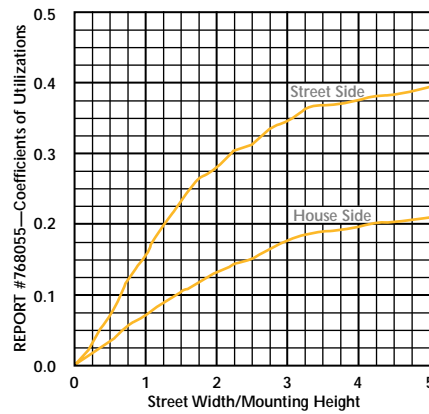


**LUMENS OUTPUT & EFFICIENCY**

REPORT #768055	LUMENS	PERCENT OF LAMP
Downward Street Side	6721.65	42.0
Downward House Side	3681.30	23.0
Downward Total	10402.95	65.0
Upward Street Side	2710.24	16.9
Upward House Side	2260.82	14.1
Upward Total	4971.06	31.1
<b>Total Flux</b>	<b>15374.01</b>	<b>96.1</b>

REPORT #768706	LUMENS	PERCENT OF LAMP
Downward Street Side	5990.42	42.8
Downward House Side	3323.30	23.7
Downward Total	9313.72	66.5
Upward Street Side	157.13	1.1
Upward House Side	88.04	0.6
Upward Total	245.17	1.8
<b>Total Flux</b>	<b>9558.89</b>	<b>68.3</b>

**TOPS/FINIAL OPTIONS**

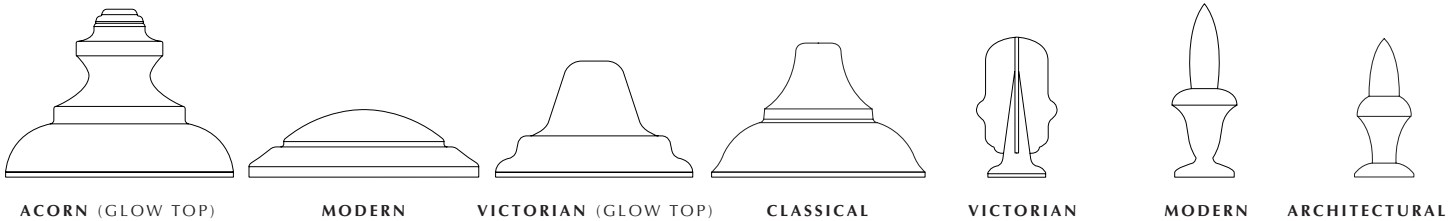

**ORDERING INFORMATION**

<b>WST</b>									
<b>Product Family</b> <sup>1</sup> WST=Westminster	<b>Lamp Wattage</b> 50=50W 70=70W 10=100W 15=150W 17=175W 25=250W	<b>Lamp Type</b> M=MH <sup>2</sup> S=HPS	<b>Ballast Type</b> R=Reac./NPF <sup>2</sup> H=Reac./HPF N=Hi. Reac./NPF P=Hi. Reac./HPF W=CWA K=10KV CWA <sup>4</sup>	<b>Voltage</b> 2=120V 0=208V 4=240V 7=277V 8=480V 9=347V W=Multi-Tap wired 120V N=Multi-Tap wired 277V V=Multi-Tap wired 240V	<b>Refractor Type</b> 33=Type III 55=Type V	<b>Band Type</b> <sup>5</sup> 4=Brass Band 5=Painted Band X=None	<b>Top Type</b> 1=Acorn 2=Modern 3=Victorian 4=Classical	<b>Finial Type</b> <sup>5</sup> 1=Victorian 2=Modern 3=Architectural X=None	<b>Options</b> (add as suffix) <sup>6</sup> 1=Single Fuse, Internally Mounted (120, 277V) 2=Double Fused, Internally Mounted (208, 240 or 480V) 4=NEMA Twistlock Photocontrol Receptacle 6=White 7=Federal Matte Green 8=Bronze H=Hartford Green Y=Silver P=Polycarbonate Refractor R=Internal Downlight Reflector U=UL/CSA Listed <b>Accessories</b> (order separately) AA1000=House Side Shield

NOTE: <sup>1</sup> Standard color is black, other finish colors available. Consult your Streetworks Representative. <sup>2</sup> Available in 120V only. <sup>3</sup> Medium-base porcelain socket standard, for 150W and below Metal Halide. <sup>4</sup> Available 50-150W, 120/240 or single voltage only. <sup>5</sup> When brass band is chosen, finial finished in gold. <sup>6</sup> When ordering options, order in alphanumeric order.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>